




TECHNICAL DATA SHEET – CHEMICAL WET AGENT, FATSEAL AUTOMATIC SUPPRESSION SYSTEMS

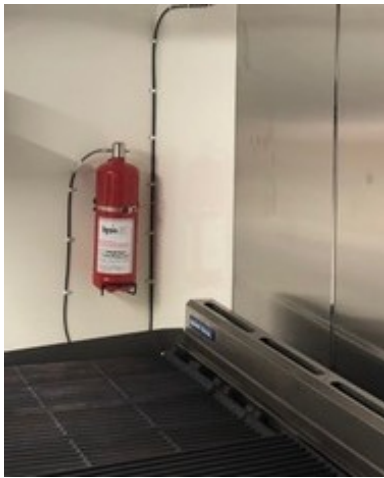

Chemical Wet Agent – Fatseal is specially formulated to deal with Class A combustible materials, Class B flammable liquid and Class F Fat

At Ignis we mainly use Fatseal for both domestic and commercial kitchen applications.

Fatseal is a foam and as such smothers the flames and prevents re-ignition by sealing the surface of the solution but has added properties to make it especially effective when dealing with fat fires.

	1kg	2kg	4kg	6kg
Capacity (ltr)	1.4	2.6	4.5	7.5
Cylinder weight (kg)	0.4	0.85	2.05	3.05
Full weight (kg)	1.9	3.3	6.4	9.5
Cylinder height (mm)	275	375	330	450
Cylinder diameter (mm)	90	110	150	160
Max working pressure (bar)	13.3	18.8	20	18
Working pressure (bar)	12.5	12.5	12.5	12.5
Test pressure	27	27	30	27
Approval	CE0029	CE0029	CE1697	CE0029
Vicat point High temp(°C)	110 to 140	110 to 140	110 to 140	110 to 140
Vicat point Low temp (°C)	80 to 100	80 to 100	80 to 100	80 to 100
External diam. tube (mm)	6	6	6	6
Internal diam. tube (mm)	4	4	4	4

Holmshaw, Beattock, Moffat, DG10 9SQ

Tel: 01683 300464, Mobile: 07540 948822, Email: info@ignisltd.co.uk

Company number: SC584659, VAT Number: 285 5489 51